

FEATURES

- The specification is cover the SAW Filter 372.5MHz that is used in CATV system.

APPLICATIONS

- CATV



© TGS CRYSTALS LTD.


SPECIFICATION *

Parameters		Product	Option Code
		SF	SF
Centre Frequency(fc) :		372.500MHz	▲
Temp. Stability	Turnover Temp.(To):	54°CMax.	▲
	Turnover Frequency(fo):	fc 372.5 MHz	▲
	Frequency Temp. Coefficient(FTC):	0.032ppm/°C ²	▲
Insertion Loss(IL):		5.0 dB Max.	▲
Operating Temp. Range:		-10°C~+60°C	▲
Storage Temp. Range:		-40°C~+85°C	▲
3 dB Bandwidth(BW ₃):		800KHz Max.	▲
Pass band Ripple:		±1.0dB Max.	▲
DC Insulation Resistance between Any Two Pins:		1.0MΩ Min.	▲
Frequency Aging Absolute Value During the First Year(fA)		<10ppm/year	▲
Rejection	at fc-21.4MHz(I _{mal}):	40dBMin.	▲
	at fc-10.7MHz(LO):	15dB Min.	▲
	Ultimate:	80dB	▲
CW Therefore Power Dissipation:		+10dBm	▲
DC Voltage Between Any Two Pins:		±30V DC	▲
Case Temperature:		-40°C~+85°C	▲
Reference Temp.:		TA=25°C	▲
Terminating source impedance:		Z _s =50Ω and matching network	▲
Terminating load impedance:		Z _L =50Ω and matching network	▲
Holder Type:	TO-39	△	T
Package:	Tube	△	U


▲ Standard * Specifications Subject to Change Without Notice
 △ Optional: please specify required code when inquiring or ordering
NOTE

1. Electrostatic Sensitive Device. Observe Precautions for handling.
2. Typical test circuit is shown for TO-39 RF filters.
3. Passband and reject bands are specified in reference to fc.
4. All characteristics are specified over the operating temperature range and typical aging for 10 years.
5. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture. Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
6. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
7. The design, manufacturing process, and specifications of this device are subject to change without notice.
8. The turnover temperature, To, is the temperature of maximum(or turnover) frequency, fo. The nominal frequency at any case temperature, Tc, outside the operating temperature range may be calculated from: $f=f_0[1-FTC(T_0-T_c)^2]$.


DIMENSIONS

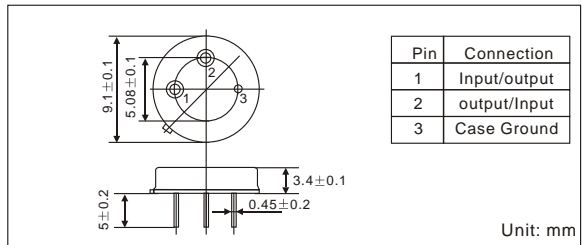

TEST CIRCUIT

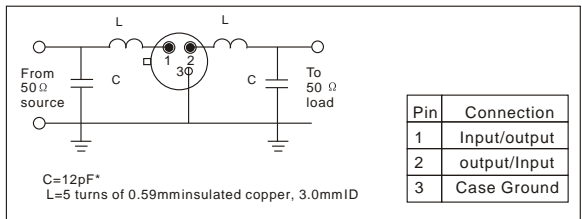

TYPICAL FREQUENCY RESPONSE

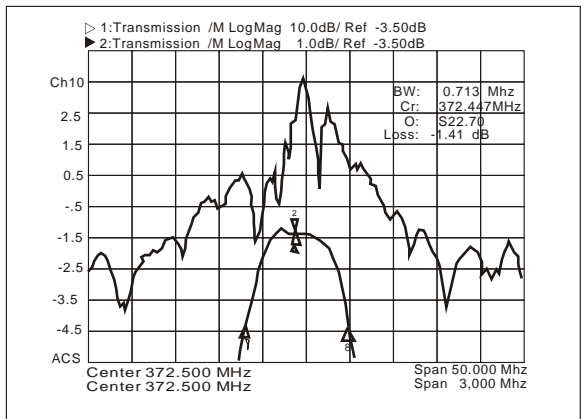

PACKAGE

- Standard package in Tube: 20pcs/Tube.

PART NUMBER GUIDE

TGS	SF	372.5	T	U
Mark	SAW Filters	Centre Freq.	Holder Type	Package

e.g. TGS SF 372.5 T U

