


FEATURES

- The SR868.35-M3 is a true one-port, Surface-acoustic-wave(SAW) resonator in a surface-mount, ceramic M3 case. It provides reliable, fundamental-mode, quartz frequency stabilization offixed- frequency transmitters operating at 868.35MHz.

APPLICATIONS

- Communication

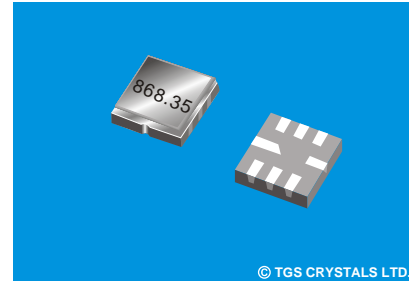

© TGS CRYSTALS LTD.

SPECIFICATION \*

Parameters		Product	Option Code
		SR	SR
Centre Frequency( $f_c$ ) :	868.350MHz	▲	868.350
Frequency Tolerance( $\Delta f_c$ ):	$\pm 150$ KHz	△	C
	$\pm 200$ KHz	△	D
	$\pm 250$ KHz	△	E
Temp. Stability	Turnover Temp( $T_o$ ): 55°C Max.	▲	
	Turnover Frequency( $f_o$ ): $f_c$ 868.35 MHz	▲	
	Frequency Temp. Coefficient (FTC): 0.037ppm/°C <sup>2</sup>	▲	
Insertion Loss(IL):	2.0 dB Max.	▲	
Operating Temp. Range:	-10°C~+60°C	▲	
Storage Temp. Range:	-40°C~+85°C	▲	
Quality Factor	Unloaded Q( $Q_u$ ):	9,000	▲
	50 $\Omega$ Loaded Q( $Q_L$ ):	1,500	▲
DC Insulation Resistance between Any Two Pins:		1.0M $\Omega$ Min.	▲
Frequency Aging Absolute Value During the First Year( $f_a$ ):		$\leq 10$ ppm/year	▲
RF Equivalent RLC Model	Motional Resistance( $R_m$ ):	26 $\Omega$ Max.	▲
	Motional Inductance( $L_m$ ):	43.3251 $\mu$ H	▲
	Motional Capacitance( $C_m$ ):	0.776 fF	▲
	Shunt Static Capacitance ( $C_o$ ):	2.8 pF Max.	▲
CW Therefore Power Dissipation:		+10dBm	▲
DC Voltage Between Any Two Pins:		$\pm 30$ V DC	▲
Case Temperature:	-40°C~+85°C	▲	
Soldering Temperature:	+235°C	▲	
Holder Type:	5.0X5.0X1.35mm	△	M3
Package:	Tape/Reel	△	T

▲ Standard \* Specifications Subject to Change Without Notice  
 △ Optional: please specify required code when inquiring or ordering

NOTE


1. Electrostatic Sensitive Device. Observe precautions for handling
2. Freq. aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temp. above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
3. The center freq.,  $f_c$ , is measured at the minimum insertion loss point,  $IL_{min}$ , with the resonator in the 50  $\Omega$  test system (VSWR  $\leq 1.2:1$ ). Typically,  $T_{f_{oscillator}}$  or  $f_{transmitter}$  is appr. equal to the resonator  $f_c$ .
4. Typically, equipment utilizing this device requires emissions approval, which is the responsibility of the equipment manufacturer.
5. Unless noted otherwise, case temperature  $T_c = +25^\circ C \pm 2^\circ C$ .
6. The design, manufacturing process, and specifications of this device are subject to change without notice.
7. Derived mathematically from one or more of the following directly measured parameters:  $f_c$ , IL, 3 dB bandwidth,  $f_c$  versus  $T_c$ , and  $C_o$ .
8. Turnover temperature,  $T_o$  is the temperature of maximum (or turnover) freq.,  $f_o$ . The nominal center freq. at any case temp.,  $T_c$ , may be calculated from:  $f = f_o [1 - FTC (T_c - T_o)^2]$ . Typically, oscillator  $T_o$  is appr. equal to the specified resonator  $T_o$ .

PART NUMBER GUIDE


TGS	SR	868.35	C	M3	T
Mark	SAW Resonators One-Port	Centre Freq.	Frequency Tolerance	Holder Type	Package

e.g. TGS SR 868.35 C M3 T


DIMENSIONS

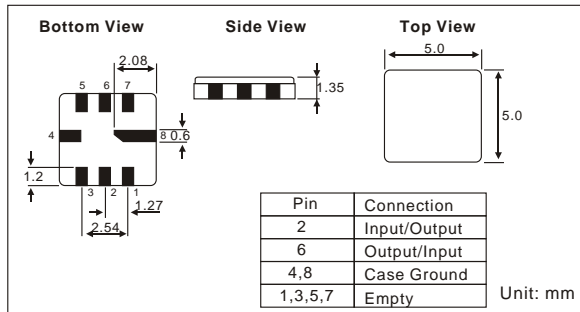


EQUIVALENT LC MODEL AND TEST CIRCUIT

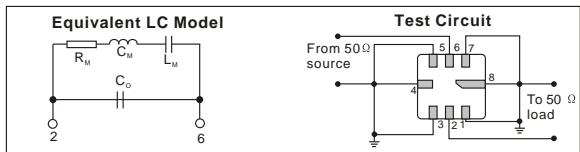


TYPICAL APPLICATION CIRCUIT

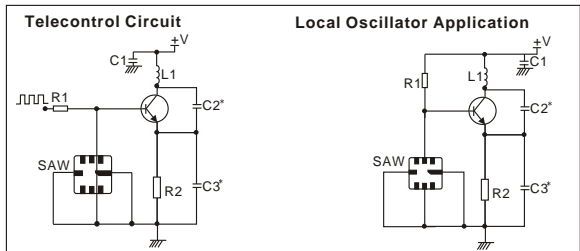

TEMPERATURE CHARACTERISTICS

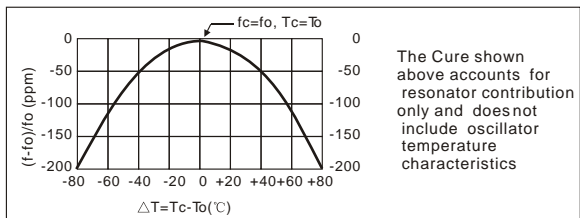

TYPICAL FREQUENCY RESPONSE

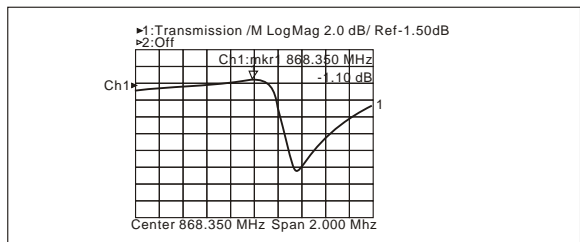

PACKAGE

- Standard package in T/R: 3000pcs/Reel, 2Reel/box, 5box/ Carton  
 See page 182 for detail dimensions

