


FEATURES

- Low cost
- Ex-stock Availability
- Lead Free available

APPLICATIONS

- TV/VCR

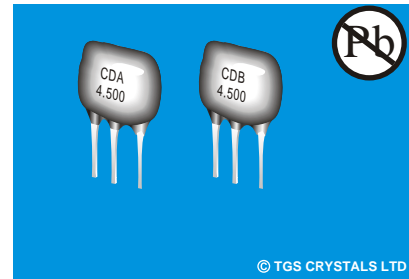

SPECIFICATION FOR CDA *


Part number	Recovered Audio Voltage(mV)	Recovered Audio3dB Band Width(kHz)	Distortion Factor(%)	Detection Method	Applicable IC
CDA4.5M	≥100	≥ ±50	≤3	Differential Peak	TA7176P
CDA5.5M	≥100	≥ ±50	≤3		TA7176P
CDA6.0M	≥100	≥ ±50	≤3		TA7176P
CDA6.5M	≥100	≥ ±50	≤3		TA7176P

SPECIFICATION FOR CDB *


Part number	Recovered Audio Voltage(mV)	Recovered Audio3dB Band Width(kHz)	Distortion Factor(%)	Detection Method	Applicable IC
CDB4.5M	≥140	≥ ±55	≤1.5	Quadrature	μ PC1382C
CDB5.5M	≥140	≥ ±55	≤1.5		μ PC1382C
CDB6.0M	≥140	≥ ±60	≤1.5		μ PC1382C
CDB6.5M	≥200	≥ ±60	≤1.5		μ PC1382C

* Specifications Subject to Change Without Notice



DIMENSION

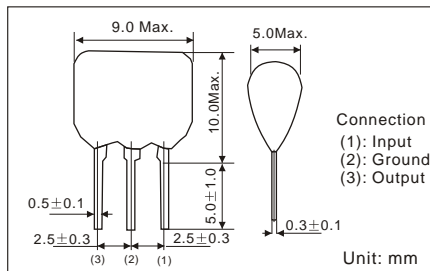

TEST CIRCUIT

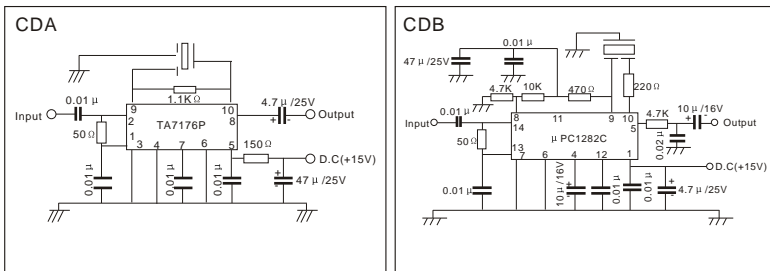

CHARACTERISTICS

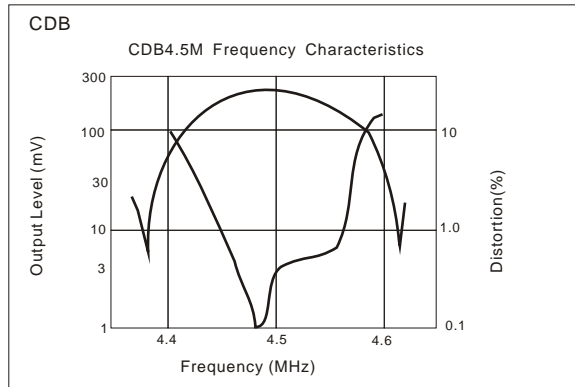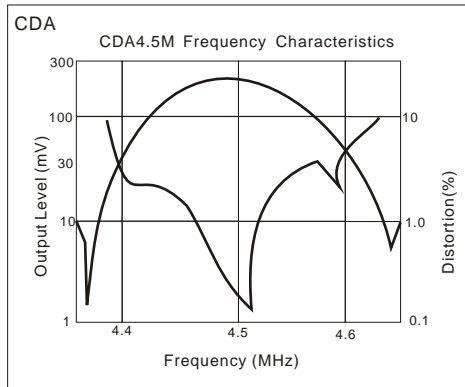

PART NUMBER GUIDE

TGS	CD	A	4.5M	B	LF
Mark	Ceramic Discriminator	A: Type A B: Type B	Freq. Range	Package in bulk	Lead Free

PACKAGE

- Standard package in bulk: 500pcs/bag, 10 bags/inner box, 10 box/carton
 - Available on T/R & AMNO-Pack - 2000pcs per reel.
- See page 95 for detail dimensions

e.g. Full P/N.: TGS CDA 4.5M B LF

