TAPE & REEL DIMENSIONS (UNIT: MM)

TAPE/REEL DIMENSIONS FOR CU & CT

Tape

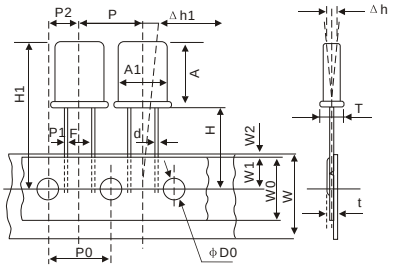

See Table 1

Reel

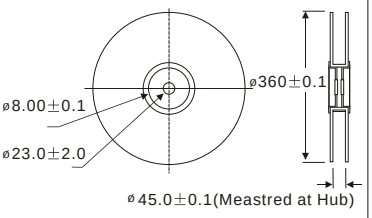

1,000 pcs/ Reel

AMNO-PACK



1,000 pcs/ AMNO-PACK

Table 1

Description	Symbol	Dimensions	Description	Symbol	Dimensions
Outside Diameter of Component	A1xA	13.5x11.1	Tape Width	W	18.2±0.2
Thickness of Component	T	5.0Max.	Adhesive Tape Width	W0	13.0 $^{+0.8}_{-0.2}$
Lead Wire Diameter	d	ø 0.043 $^{+0.05}_{-0.02}$	Tolerance of Leading Hole(Vertical)	W1	8.5±0.3
Interval Spacing of Component	P	12.7±1.0	Tolerance of Cover Tape	W2	2.0Max.
Pitch of Leading Hole	P0	12.7±1.0	Bottom Surface Position of Component	H	18.0±2.0
Tolerance of Leading Hole	P1	3.85±0.7	Top Surface Position of Component	H1	33.6Max.
	P2	6.35±1.0	Hole Diameter	D0	ø4.0±0.2
Lead Pitch	F	5.0 $^{+0.5}_{-0.2}$	Tape Thickness	t	0.7±0.1
Inclination	Δh	0±1.0	Inclination	Δh1	0±1.0

TAPE/REEL DIMENSIONS FOR CUMA & CUMB

Tape

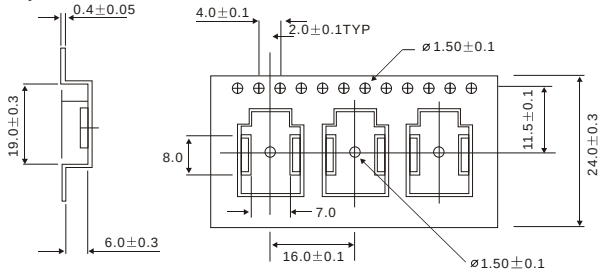

Reel



1,000 pcs/ Reel

See Table 2

Table 2

Description			Code	Dimensions
Flanges	Diameter		A	Ø 330±2.0
	Thickness		t	2.4±0.2
	Width between Flanges		W	24.4 $^{+2.0}_{-0}$
Center Core	Outline Diameter		B	Ø 100±2.0
	Center Core Slit	Width	F	2.3±1.0
		Depth	V	6.0±1.0
		Position	Q	120° ±3°
	Spindle Diameter		C	Ø 13.0±0.5
	Key Seats	Width	E	2.5
		Depth	U	5.0±0.5
		Position	Q	120° ±3°
Fenestrate	Outline Radius		Ro	R90±1.0
	Inline Radius		Ri	R40±1.0
	Rounded Corners		Rc	R5 $^{+2.0}_{-0}$
	Open Angle		R	40° ±2°

TAPE WITH CRIMPED LEADS FOR CU & CT

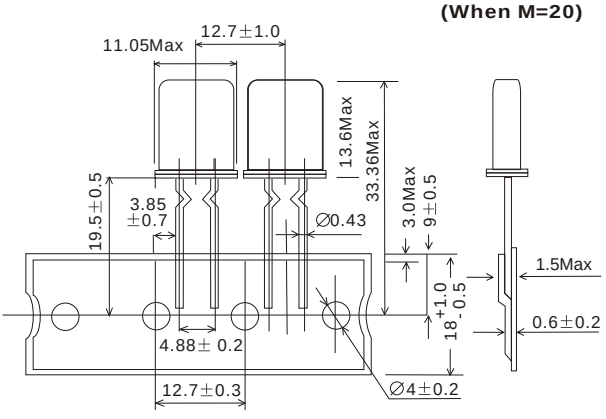

© TGS CRYSTALS LTD.