

# TAPE & REEL DIMENSIONS (UNIT: MM)

## TAPE/REEL DIMENSIONS FOR CRAV & CRTV



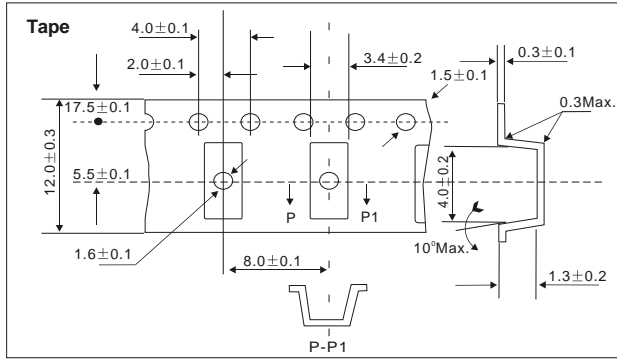


Table 1

∅A	∅B	W	T	Pieces per reel	Carrier tape size
179±2	60Typ.	12.4Min.	19.4Max.	1000typ.	12
179±2	60Typ.	16.4Min.	22.4Max.	1000typ.	16
330±3	80Min.	12.4Min.	19.4Max.	4000typ.	12
330±3	80Min.	16.4Min.	22.4Max.	4000typ.	16

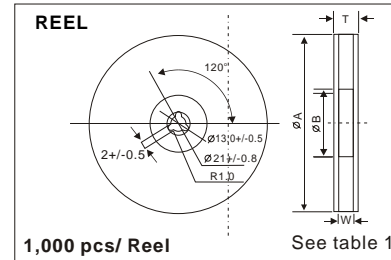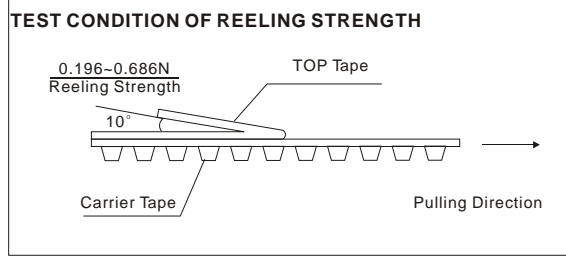

## TAPE DIMENSIONS FOR CF10.7M

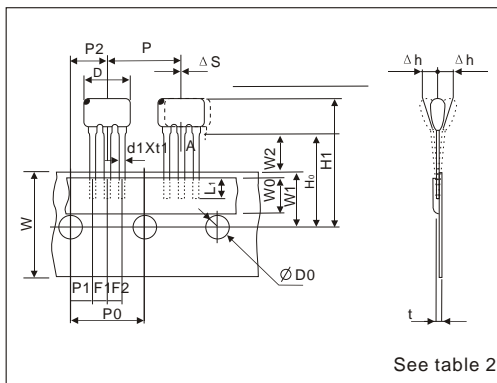


Table 2

Item	Code	Dimension
Body Diameter	D	10.0 Max.
Body Height	A	7.5 Max.
Lead Dimensions	D1Xt1	0.5x0.3(±0.1)
Portion to Cut In Case of Defect	L1	5.0 Min.
Pitch of Component	P	12.7±0.5
Pitch of Sprocket Hole	P0	12.7±0.2 (10XP0=127±1)
Length from Hole Centre to Lead	P1	3.85±0.5
Length from Hole Centre to Component Centre	P2	6.35±0.5
Lead Spacing	F1,F2	2.5±0.2
Deviation across Tape	∆h	0±1.0
Carrier Tape Width	W	18.0±0.5
Hold-down Tape Width	W0	6.0 Min.
Position of Sprocket Hole	W1	9.0±0.5
Hold-down Tape Width	W2	0(+0.5,-0)
Lead Distance between Reference and Bottom Planes	H0	18.0±0.5
Distance Between Reference	H1	26.0 Max.
Diameter of Sprocket Hole	D0	∅ 4.0±0.2
Total Tape Thickness	t	0.6V0.2
Deviation across Body Centre	∆s	0±0.1

